

Ufo emergency 3h

UFO 16W IP44 4000K EMERGENCY SA

Cod: **6360646**



IP44
Protected against solid objects larger than 1 mm and splashes



I
Protection class I



CRI >80
Colour rendering index >80



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6360646 | Category: Outdoor luminaires | Model: Ufo emergency 3h | Product description: UFO 16W IP44 4000K EMERGENCY SA | Source type: SMD 2835 | Number of LEDs: 88 | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1530 | Beam angle: 120° | LED Lifetime: 30.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Diameter (mm): 360 | Height (mm): 105 | Weight (g): 1300 | IP rating: IP 44 | Finishing colour: White | Body material: Aluminum | Diffuser material: PMMA (polymethyl methacrylate) | Maximal working temperature: -20° C | Minimal working temperature: +40° C | Nominal power (W): 18 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD 2835	Beam angle	120°
Number of LEDs	88	LED Lifetime	30.000 h
Color temperature (CCT)	4000K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
Color render index (CRI)	> 80		
MacAdam (SDCM)	< 6		
Lumen output (lm)	1530		


Mechanical data

Diameter (mm)	360	Finishing colour	White
Height (mm)	105	Body material	Aluminum
Weight (g)	1300	Diffuser material	PMMA (polymethyl methacrylate)
IP rating	IP 44		

Electrical data

Nominal power (W)	18	Insulation class	I
Power factor	0,5	Dimmable	No
Power supply	230V 50/60Hz		
Ballast	Integrated		

Photometry

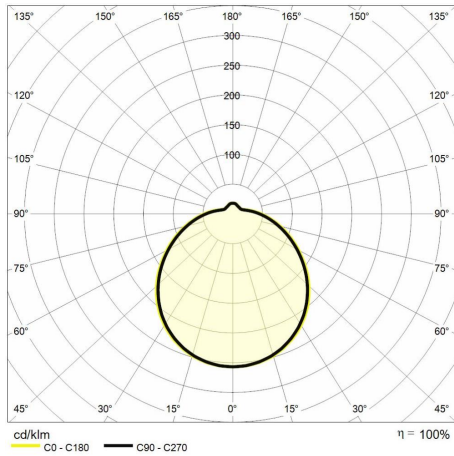

Technical drawing

