



Applique oval 230mm

APPLIQUE OVAL 15W LED IP54 3000K

Cod: **6360773**



IP54 Protected against dust and splashes



II Protection class II



CRI >80 Colour rendering index >80



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6360773 | Category: Outdoor luminaires | Model: Applique oval 230mm | Product description: APPLIQUE OVAL 15W LED IP54 3000K | Source type: SMD 2835 | Number of LEDs: 96 | Color temperature (CCT): 3000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1150 | Beam angle: 160° | LED Lifetime: 30.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 104 | Length (mm): 230 | Height (mm): 42 | Weight (g): 200 | IP rating: IP 54 | Finishing colour: White | Body material: PC (polycarbonate) | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 15 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

Source type	SMD 2835	Beam angle	160°
Number of LEDs	96	LED Lifetime	30.000 h
Color temperature (CCT)	3000K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
Color render index (CRI)	> 80		
MacAdam (SDCM)	< 6		
Lumen output (lm)	1150		


Mechanical data

Width (mm)	104	IP rating	IP 54
Length (mm)	230	Finishing colour	White
Height (mm)	42	Body material	PC (polycarbonate)
Weight (g)	200	Diffuser material	PC (polycarbonate)

Electrical data

Nominal power (W)	15	Insulation class	II
Power factor	0,5	Dimmable	No
Power supply	230V 50/60Hz		
Ballast	Integrated		

Photometry

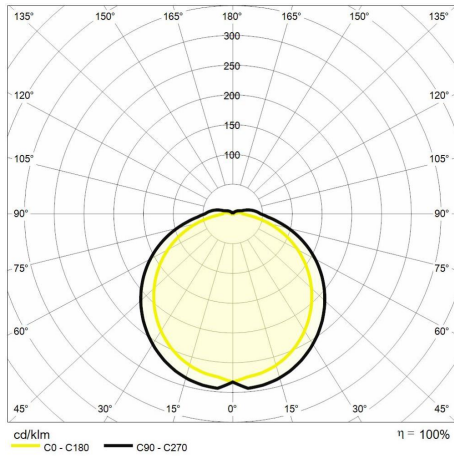

Technical drawing

