



# Applique round 238mm

APPLIQUE ROUND 20W LED IP54  
4000K

Cod: **6360776**



IP54 Protected against dust and splashes



II Protection class II



CRI >80 Colour rendering index >80



ReeR warranty  
ReeR guarantees the product for a time duration of 3 years



## Technical description

Product code: 6360776 | Category: Outdoor luminaires | Model: Applique round 238mm | Product description: APPLIQUE ROUND 20W LED IP54 4000K | Source type: SMD 2835 | Number of LEDs: 108 | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1500 | Beam angle: 160° | LED Lifetime: 30.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Diameter (mm): 238 | Height (mm): 49 | Weight (g): 400 | IP rating: IP 54 | Finishing colour: White | Body material: PC (polycarbonate) | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 20 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

## Lighting data

Source type	SMD 2835	Beam angle	160°
Number of LEDs	108	LED Lifetime	30.000 h
Color temperature (CCT)	4000K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
Color render index (CRI)	> 80		
MacAdam (SDCM)	< 6		
Lumen output (lm)	1500		


## Mechanical data

Diameter (mm)	238	Finishing colour	White
Height (mm)	49	Body material	PC (polycarbonate)
Weight (g)	400	Diffuser material	PC (polycarbonate)
IP rating	IP 54		

## Electrical data

Nominal power (W)	20	Insulation class	II
Power factor	0,5	Dimmable	No
Power supply	230V 50/60Hz		
Ballast	Integrated		

## Photometry

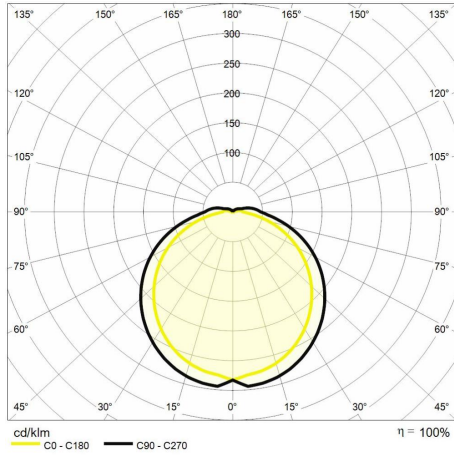

## Technical drawing

