



Applique square 270mm

APPLIQUE SQUARE 24W LED IP44
4000K

Cod: **6360780**



IP44

Protected against solid objects larger than 1 mm and splashes



II

Protection class II



CRI >80

Colour rendering index >80



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6360780 | Category: Outdoor luminaires | Model: Applique square 270mm | Product description: APPLIQUE SQUARE 24W LED IP44 4000K | Source type: SMD 2835 | Number of LEDs: 144 | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1800 | Beam angle: 110° | LED Lifetime: 30.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 270 | Length (mm): 270 | Height (mm): 62 | Weight (g): 800 | IP rating: IP 44 | Finishing colour: White | Body material: PC (polycarbonate) | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 24 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

Source type	SMD 2835	Beam angle	110°
Number of LEDs	144	LED Lifetime	30.000 h
Color temperature (CCT)	4000K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
Color render index (CRI)	> 80		
MacAdam (SDCM)	< 6		
Lumen output (lm)	1800		


Mechanical data

Width (mm)	270	IP rating	IP 44
Length (mm)	270	Finishing colour	White
Height (mm)	62	Body material	PC (polycarbonate)
Weight (g)	800	Diffuser material	PC (polycarbonate)

Electrical data

Nominal power (W)	2,4	Insulation class	II
Power factor	0,9	Dimmable	No
Power supply	230V 50/60Hz		
Ballast	Integrated		

Photometry

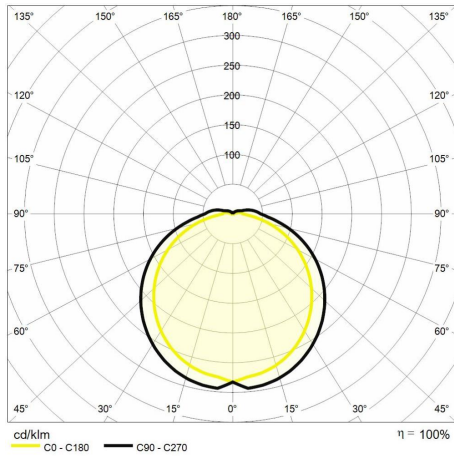

Technical drawing

