



# Applique square 270mm

APPLIQUE SQUARE 24W LED IP44  
3000K

Cod: **6360781**



IP44  
Protected against solid objects  
larger than 1 mm and splashes



II  
Protection class II



CRI >80  
Colour rendering index >80



ReeR warranty  
ReeR guarantees the product for a  
time duration of 3 years



## Technical description

Product code: 6360781 | Category: Outdoor luminaires | Model: Applique square 270mm | Product description: APPLIQUE SQUARE 24W LED IP44 3000K | Source type: SMD 2835 | Number of LEDs: 144 | Color temperature (CCT): 3000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1750 | Beam angle: 110° | LED Lifetime: 30.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 270 | Length (mm): 270 | Height (mm): 62 | Weight (g): 800 | IP rating: IP 44 | Finishing colour: White | Body material: PC (polycarbonate) | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 24 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

## Lighting data

Source type	SMD 2835	Beam angle	110°
Number of LEDs	144	LED Lifetime	30.000 h
Color temperature (CCT)	3000K	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
Color render index (CRI)	> 80		
MacAdam (SDCM)	< 6		
Lumen output (lm)	1750		


## Mechanical data

Width (mm)	270	IP rating	IP 44
Length (mm)	270	Finishing colour	White
Height (mm)	62	Body material	PC (polycarbonate)
Weight (g)	800	Diffuser material	PC (polycarbonate)

## Electrical data

Nominal power (W)	2,4	Insulation class	II
Power factor	0,9	Dimmable	No
Power supply	230V 50/60Hz		
Ballast	Integrated		

## Photometry

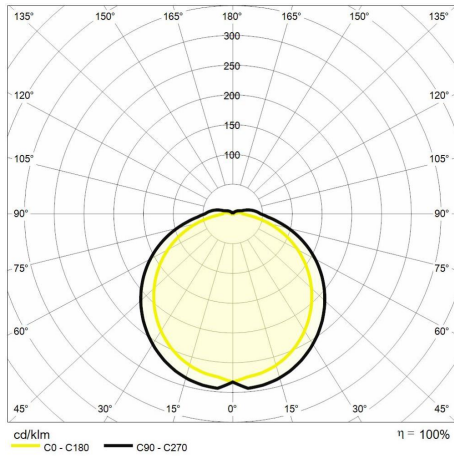

## Technical drawing

