

# Miniled III - 873mm

MINILED III 14W 4000K 873x22x30mm

Cod: **6360786**



IP20  
Protected from solid bodies larger than 12 mm



II  
Protection class II



CRI >80  
Colour rendering index >80



ReeR warranty  
ReeR guarantees the product for a time duration of 3 years



## Technical description

Product code: 6360786 | Category: Indoor luminaires | Model: Miniled III - 873mm | Product description: MINILED III 14W 4000K 873x22x30mm | Source type: SMD 2835 | Number of LEDs: 125 | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1540 | Beam angle: 150° | Photobiological risk: RG0 (exempt) | LED Lifetime: 25.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 22 | Length (mm): 873 | Height (mm): 30 | Weight (g): 170 | IP rating: IP 20 | Finishing colour: White | Body material: PC (polycarbonate) | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 14 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

## Lighting data

Source type	SMD 2835	Beam angle	150°
Number of LEDs	125	Photobiological risk	RG0 (exempt)
Color temperature (CCT)	4000K	LED Lifetime	25.000 h
Color render index (CRI)	> 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): E
MacAdam (SDCM)	< 6		
Lumen output (lm)	1540		


## Mechanical data

Width (mm)	22	IP rating	IP 20
Length (mm)	873	Finishing colour	White
Height (mm)	30	Body material	PC (polycarbonate)
Weight (g)	170	Diffuser material	PC (polycarbonate)


## Electrical data

Nominal power (W)	14	Insulation class	II
Power factor	0,5	Dimmable	No
Power supply	230V 50/60Hz		
Ballast	Integrated		

## Photometry

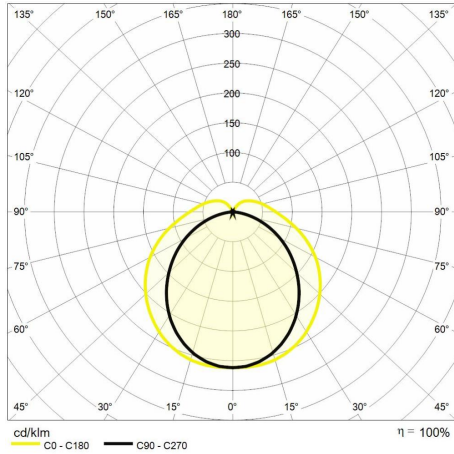

## Technical drawing

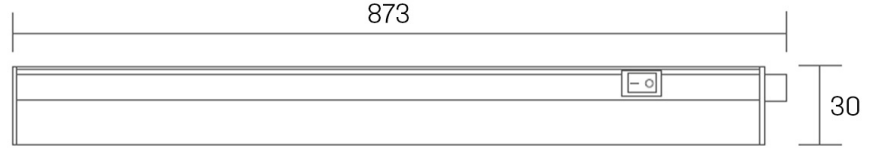

## Accessories



### Miniled cables

CONNECTOR for Miniled connection

Cod: 6360484