

Street Star 40W

STREET STAR 40W 4000K IP66 230V

Cod: **6360806**



IP66
Dustproof and protected against waves



I
Protection class I



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6360806 | Category: Outdoor luminaires | Model: Street Star 40W | Product description: STREET STAR 40W 4000K IP66 230V | Source type: SMD | Number of LEDs: 24 | Color temperature (CCT): 4000K | Color render index (CRI): > 70 | MacAdam (SDCM): < 6 | Lumen output (lm): 4400 | Beam angle: Asymmetric 30° x 140° | Photobiological risk: RG2 (moderate risk) | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 400 | Length (mm): 220 | Height (mm): 235 | Weight (g): 3800 | IP rating: IP 66 | IK rating: IK 08 | Finishing colour: Grey RAL9007 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -40° C | Minimal working temperature: +50° C | Nominal power (W): 40 | Power factor: > 0,95 | Power supply: 100-240V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD	Beam angle	Asymmetric 30° x 140°
Number of LEDs	24	Photobiological risk	RG2 (moderate risk)
Color temperature (CCT)	4000K	LED Lifetime	50.000 h
Color render index (CRI)	> 70	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): E
MacAdam (SDCM)	< 6		
Lumen output (lm)	4400		


Mechanical data

Width (mm)	400	IK rating	IK 08
Length (mm)	220	Finishing colour	Grey RAL9007
Height (mm)	235	Type of finishing	Polyester powder coated
Weight (g)	3800	Body material	Aluminum
IP rating	IP 66	Diffuser material	Tempered glass

Electrical data

Nominal power (W)	40	Insulation class	I
Power factor	> 0,95	Dimmable	No
Power supply	100-240V 50/60Hz		
Ballast	Integrated		

Photometry

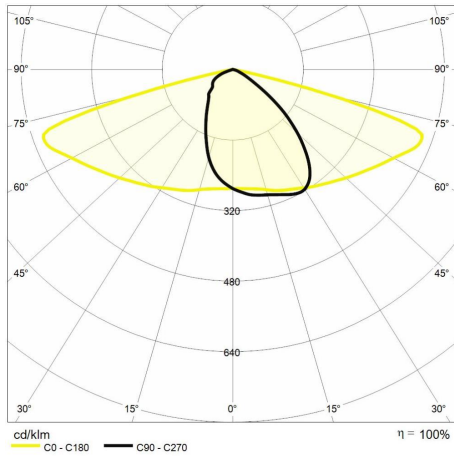

Technical drawing

