

# Hotel

HOTEL USB 5W 230V 3000K IP20 black

Cod: **6360975**



IP20  
Protected from solid bodies larger than 12 mm



I  
Protection class I



CRI >90  
Colour rendering index >90



ReeR warranty  
ReeR guarantees the product for a time duration of 3 years



## Technical description

Product code: 6360975 | Category: Indoor luminaires | Model: Hotel | Product description: HOTEL USB 5W 230V 3000K IP20 black | Source type: COB | Number of LEDs: 1 | Color temperature (CCT): 3000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 330 | Beam angle: 40° | Photobiological risk: RG1 (low risk) | LED Lifetime: 30.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 180 | Length (mm): 85 | Height (mm): 27 | Weight (g): 1000 | IP rating: IP 20 | Finishing colour: Black | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +45° C | Nominal power (W): 5 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: Yes (built-in switch) |

## Lighting data

Source type	COB	Beam angle	40°
Number of LEDs	1	Photobiological risk	RG1 (low risk)
Color temperature (CCT)	3000K	LED Lifetime	30.000 h
Color render index (CRI)	> 90	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
MacAdam (SDCM)	< 3		
Lumen output (lm)	330		


## Mechanical data

Width (mm)	180	Finishing colour	Black
Length (mm)	85	Type of finishing	Polyester powder coated
Height (mm)	27	Body material	Aluminum
Weight (g)	1000	Diffuser material	PC (polycarbonate)
IP rating	IP 20		

## Electrical data

Nominal power (W)	5	Insulation class	I
Power factor	0,9	Dimmable	Yes (built-in switch)
Power supply	230V 50/60Hz		
Ballast	Integrated		

## Photometry

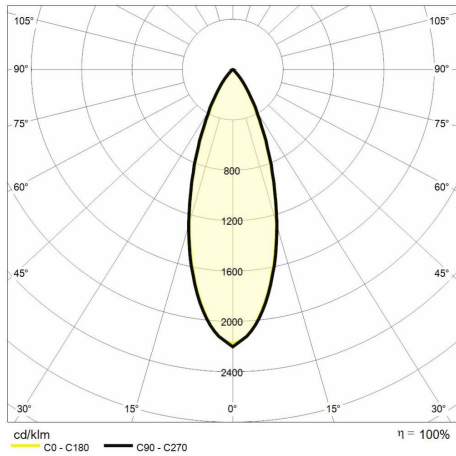

## Technical drawing

