

Unica EVO mono 1200mm



UNICA EVO MONO 24W IP65 1200mm
4000K

Cod: **6360978**



IP65

Dustproof and protected against water jets



I

Protection class I



CRI >80

Colour rendering index >80



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6360978 | Category: Outdoor luminaires | Model: Unica EVO mono 1200mm | Product description: UNICA EVO MONO 24W IP65 1200mm 4000K | Source type: SMD | Number of LEDs: 124 | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 4 | Lumen output (lm): 2800 | Beam angle: 120° | Photobiological risk: RG0 (exempt) | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 72 | Length (mm): 1200 | Height (mm): 58 | Weight (g): 1120 | IP rating: IP 65 | IK rating: IK 08 | Finishing colour: Grey | Body material: PC (polycarbonate) | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +55° C | Nominal power (W): 24 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Included | Insulation class: I | Dimmable: No |

Lighting data

| | | | |
|--------------------------|-------|-------------------------|--|
| Source type | SMD | Beam angle | 120° |
| Number of LEDs | 124 | Photobiological risk | RG0 (exempt) |
| Color temperature (CCT) | 4000K | LED Lifetime | 50.000 h |
| Color render index (CRI) | > 80 | Energy efficiency class | This contains a light source of energy efficiency class (EU2019/2015): E |
| MacAdam (SDCM) | < 4 | | |
| Lumen output (lm) | 2800 | | |


Mechanical data

| | | | |
|-------------|-------|-------------------|--------------------|
| Width (mm) | 72 | IK rating | IK 08 |
| Length (mm) | 1200 | Finishing colour | Grey |
| Height (mm) | 58 | Body material | PC (polycarbonate) |
| Weight (g) | 1120 | Diffuser material | PC (polycarbonate) |
| IP rating | IP 65 | | |

Electrical data

| | | | |
|-------------------|--------------|------------------|----|
| Nominal power (W) | 2,4 | Insulation class | I |
| Power factor | 0,9 | Dimmable | No |
| Power supply | 230V 50/60Hz | | |
| Ballast | Included | | |

Photometry

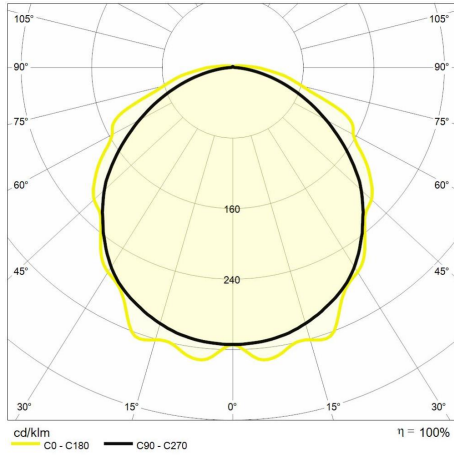

Technical drawing

