

# Unica EVO bi

## 1200mm



UNICA EVO BI 48W IP65 1200mm  
4000K

Cod: **6360979**



**IP65**  
Dustproof and protected against water jets



**I**  
Protection class I



**CRI >80**  
Colour rendering index >80



**ReeR warranty**  
ReeR guarantees the product for a time duration of 3 years



### Technical description

Product code: 6360979 | Category: Outdoor luminaires | Model: Unica EVO bi 1200mm | Product description: UNICA EVO BI 48W IP65 1200mm 4000K | Source type: SMD | Number of LEDs: 248 | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 4 | Lumen output (lm): 5500 | Beam angle: 120° | Photobiological risk: RG0 (exempt) | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 92 | Length (mm): 1200 | Height (mm): 60 | Weight (g): 1460 | IP rating: IP 65 | IK rating: IK 08 | Finishing colour: Grey | Body material: PC (polycarbonate) | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +55° C | Nominal power (W): 48 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Included | Insulation class: I | Dimmable: No |

## Lighting data

Source type	SMD	Beam angle	120°
Number of LEDs	248	Photobiological risk	RG0 (exempt)
Color temperature (CCT)	4000K	LED Lifetime	50.000 h
Color render index (CRI)	> 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): E
MacAdam (SDCM)	< 4		
Lumen output (lm)	5500		


## Mechanical data

Width (mm)	92	IK rating	IK 08
Length (mm)	1200	Finishing colour	Grey
Height (mm)	60	Body material	PC (polycarbonate)
Weight (g)	1460	Diffuser material	PC (polycarbonate)
IP rating	IP 65		

## Electrical data

Nominal power (W)	48	Insulation class	I
Power factor	0,9	Dimmable	No
Power supply	230V 50/60Hz		
Ballast	Included		

## Photometry

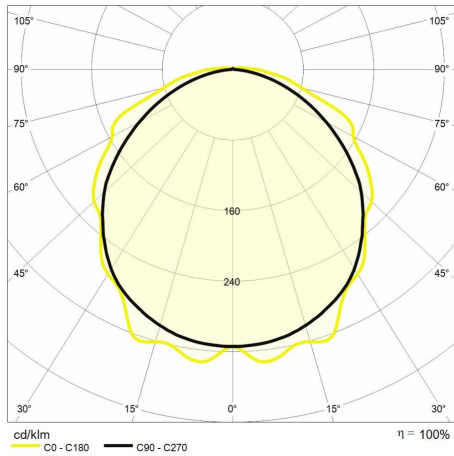

## Technical drawing

