



# Domino E 10W

DOMINO E/2,0 10W 230V IP65 4000K

Cod: **6361098**



IP65

Dustproof and protected against water jets



I

Protection class I



CRI >80

Colour rendering index >80



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



## Technical description

Product code: 6361098 | Category: Outdoor luminaires | Model: Domino E 10W | Product description: DOMINO E/2,0 10W 230V IP65 4000K | Source type: SMD | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 900 | Beam angle: 100° | Photobiological risk: RG1 (low risk) | LED Lifetime: 25.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 133 | Length (mm): 90 | Height (mm): 27 | Weight (g): 150 | IP rating: IP 65 | IK rating: IK 06 | Finishing colour: Black | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -15° C | Minimal working temperature: +45° C | Nominal power (W): 10 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

## Lighting data

|                          |       |                         |  |
|--------------------------|-------|-------------------------|--|
| Source type              | SMD   | Photobiological risk    | RG1 (low risk)   |
| Color temperature (CCT)  | 4000K | LED Lifetime            | 25.000 h   |
| Color render index (CRI) | > 80  | Energy efficiency class | This contains a light source of energy efficiency class (EU2019/2015): F |
| MacAdam (SDCM)           | < 6   |                         |  |
| Lumen output (lm)        | 900   |                         |  |
| Beam angle               | 100°  |                         |  |


## Mechanical data

|             |       |                   |                         |
|-------------|-------|-------------------|-------------------------|
| Width (mm)  | 133   | IK rating         | IK 06                   |
| Length (mm) | 90    | Finishing colour  | Black                   |
| Height (mm) | 27    | Type of finishing | Polyester powder coated |
| Weight (g)  | 150   | Body material     | Aluminum                |
| IP rating   | IP 65 | Diffuser material | Tempered glass          |

## Electrical data

|                   |              |                  |    |
|-------------------|--------------|------------------|----|
| Nominal power (W) | 10           | Insulation class | I  |
| Power factor      | 0,5          | Dimmable         | No |
| Power supply      | 230V 50/60Hz |                  |    |
| Ballast           | Integrated   |                  |    |

## Photometry

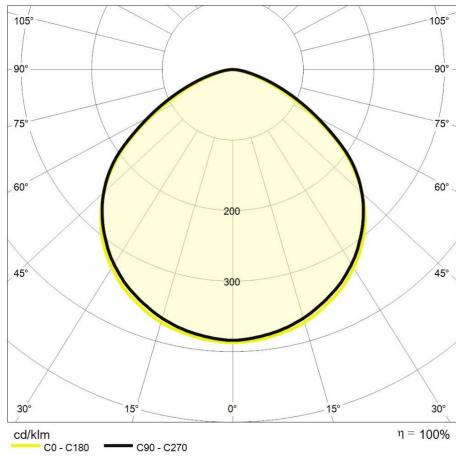

## Technical drawing

