



Domino E 100W

DOMINO E/2,0 100W 230V IP65 4000K

Cod: **6361103**



IP65

Dustproof and protected against water jets



I

Protection class I



CRI >80

Colour rendering index >80



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6361103 | Category: Outdoor luminaires | Model: Domino E 100W | Product description: DOMINO E/2,0 100W 230V IP65 4000K | Source type: SMD | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 9000 | Beam angle: 110° | Photobiological risk: RG1 (low risk) | LED Lifetime: 25.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 313 | Length (mm): 243 | Height (mm): 37 | Weight (g): 1260 | IP rating: IP 65 | IK rating: IK 06 | Finishing colour: Black | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -15° C | Minimal working temperature: +45° C | Nominal power (W): 100 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Source type	SMD	Photobiological risk	RG1 (low risk)
Color temperature (CCT)	4000K	LED Lifetime	25.000 h
Color render index (CRI)	> 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
MacAdam (SDCM)	< 6		
Lumen output (lm)	9000		
Beam angle	110°		


Mechanical data

Width (mm)	313	IK rating	IK 06
Length (mm)	243	Finishing colour	Black
Height (mm)	37	Type of finishing	Polyester powder coated
Weight (g)	1260	Body material	Aluminum
IP rating	IP 65	Diffuser material	Tempered glass

Electrical data

Nominal power (W)	100	Insulation class	I
Power factor	0,9	Dimmable	No
Power supply	230V 50/60Hz		
Ballast	Integrated		

Photometry

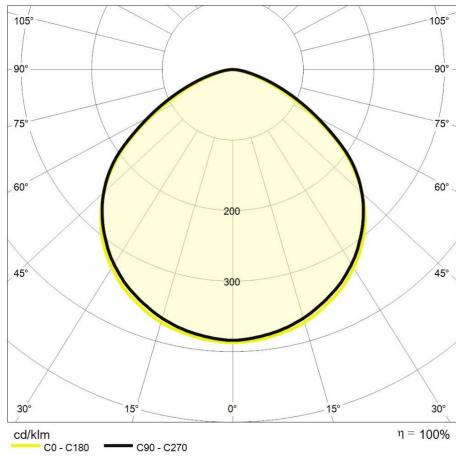

Technical drawing

