



# Domino AS 200W

DOMINO AS/2,0 CCT 200W

Cod: **6361188**



IP65

Dustproof and protected against water jets



I

Protection class I



CRI >80

Colour rendering index >80



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



## Technical description

Product code: 6361188 | Category: Outdoor luminaires | Model: Domino AS 200W | Product description: DOMINO AS/2,0 CCT 200W | Source type: SMD | Color temperature (CCT): 3000 /3500 / 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 26000-28000 | Beam angle: Asymmetric 40° x 80° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): D | Width (mm): 390 | Length (mm): 306 | Height (mm): 58 | Weight (g): 4100 | IP rating: IP 65 | IK rating: IK 07 | Finishing colour: Grey RAL7024 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -20° C | Minimal working temperature: +40° C | Nominal power (W): 200 | Power factor: > 0,9 | Power supply: 230-240V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

## Lighting data

Source type	SMD	Photobiological risk	RG1 (low risk)
Color temperature (CCT)	3000 / 3500 / 4000K	LED Lifetime	50.000 h
Color render index (CRI)	> 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): D
MacAdam (SDCM)	< 6		
Lumen output (lm)	26000-28000		
Beam angle	Asymmetric 40° x 80°		


## Mechanical data

Width (mm)	390	IK rating	IK 07
Length (mm)	306	Finishing colour	Grey RAL7024
Height (mm)	58	Type of finishing	Polyester powder coated
Weight (g)	4100	Body material	Aluminum
IP rating	IP 65	Diffuser material	Tempered glass

## Electrical data

Nominal power (W)	200	Insulation class	I
Power factor	0,9	Dimmable	No
Power supply	230-240V 50/60Hz		
Ballast	Integrated		

## Photometry

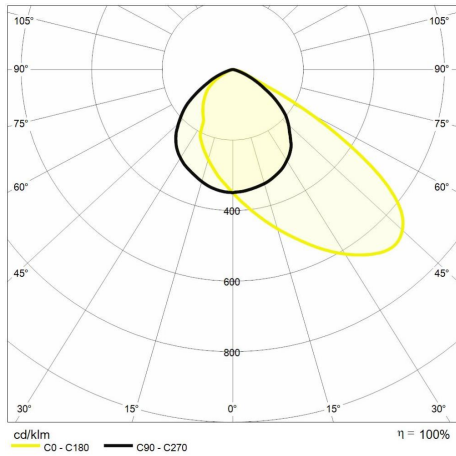

## Technical drawing

