



Elmo

ELMO WALL LIGHT 10W 4000K IP54
BLACK

Cod: **MES0003**



IP54
Protected against dust and
splashes



I
Protection class I



CRI >90
Colour rendering index >90



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Product code: MES0003 | Category: Outdoor luminaires | Model: Elmo | Product description: ELMO WALL LIGHT 10W 4000K IP54 BLACK | Color temperature (CCT): 4000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 6 | Lumen output (lm): 570 | Beam angle: 176° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Width (mm): 100 | Length (mm): 100 | Height (mm): 120 | Weight (g): 950 | IP rating: IP 54 | Finishing colour: Black RAL9005 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: PMMA (polymethyl methacrylate) | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 10 | Power factor: > 0,98 | Power supply: 220/240V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Color temperature (CCT)	4000K
-------------------------	-------

Color render index (CRI)	> 90
--------------------------	------

MacAdam (SDCM)	< 6
----------------	-----

Lumen output (lm)	570
-------------------	-----

Beam angle	176°
------------	------

Photobiological risk	RG1 (low risk)
----------------------	----------------

LED Lifetime	50.000 h
--------------	----------

Mechanical data

Width (mm)	100
------------	-----

Length (mm)	100
-------------	-----

Height (mm)	120
-------------	-----

Weight (g)	950
------------	-----

IP rating	IP 54
-----------	-------

Finishing colour	Black RAL9005
------------------	---------------

Type of finishing	Polyester powder coated
-------------------	-------------------------

Body material	Aluminum
---------------	----------

Diffuser material	PMMA (polymethyl methacrylate)
-------------------	--------------------------------

Electrical data

Nominal power (W)	10
-------------------	----

Power factor	> 0,98
--------------	--------


Power supply	220/240V 50/60Hz
--------------	------------------

Ballast	Integrated
---------	------------

Insulation class	I
------------------	---

Dimmable	No
----------	----

Photometry

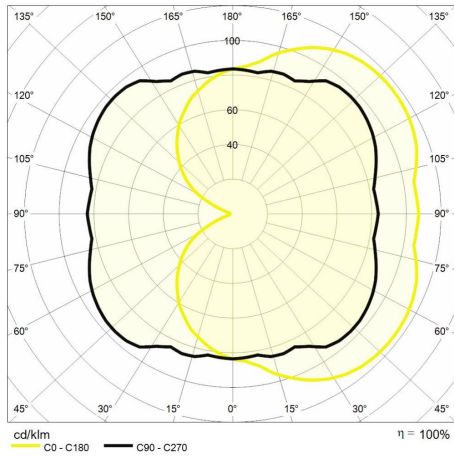

Technical drawing

