



# Accento 26W

ACCENTO 26W 3000K 20° IP65  
220-240V

Cod: **MES0235**



**IP65**  
Dustproof and protected against water jets



**I**  
Protection class I



**CRI >80**  
Colour rendering index >80



**ReeR warranty**  
ReeR guarantees the product for a time duration of 3 years



## Technical description

Product code: MES0235 | Category: Outdoor luminaires | Model: Accento 26W | Product description: ACCENTO 26W 3000K 20° IP65 220-240V | Color temperature (CCT): 3000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 4 | Lumen output (lm): 3077 | Beam angle: 20° | Photobiological risk: RG1 (low risk) | LED Lifetime: 25.000 h | Diameter (mm): 105 | Height (mm): 168 | Weight (g): 2100 | IP rating: IP 65 | Finishing colour: Black RAL9005 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Glass | Maximal working temperature: -25° C | Minimal working temperature: +35° C | Nominal power (W): 26 | Power factor: > 0,8 | Power supply: 220/240V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No | Power cable length: 1,5 |

### Lighting data

Color temperature (CCT)	3000K
-------------------------	-------

Color render index (CRI)	> 80
--------------------------	------

MacAdam (SDCM)	< 4
----------------	-----

Lumen output (lm)	3077
-------------------	------

Beam angle	20°
------------	-----

Photobiological risk	RG1 (low risk)
----------------------	----------------

LED Lifetime	25.000 h
--------------	----------

### Mechanical data

Diameter (mm)	105
---------------	-----

Height (mm)	168
-------------	-----

Weight (g)	2100
------------	------

IP rating	IP 65
-----------	-------

Finishing colour	Black RAL9005
------------------	---------------

Type of finishing	Polyester powder coated
-------------------	-------------------------

Body material	Aluminum
---------------	----------

Diffuser material	Glass
-------------------	-------

### Electrical data

Nominal power (W)	2,6
-------------------	-----

Power factor	> 0,8
--------------	-------

Power supply	220/240V 50/60Hz
--------------	------------------


Ballast	Integrated
---------	------------

Insulation class	I
------------------	---


Dimmable	No
----------	----

Power cable length	1.5
--------------------	-----

## Photometry

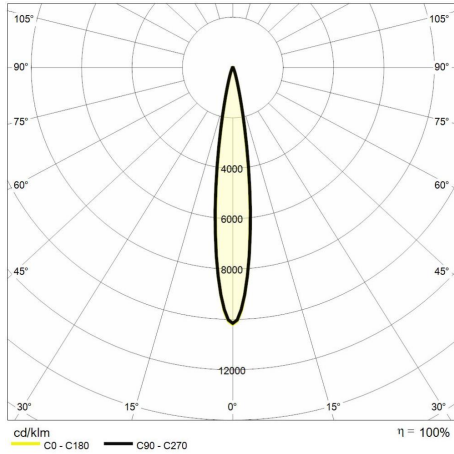

## Technical drawing

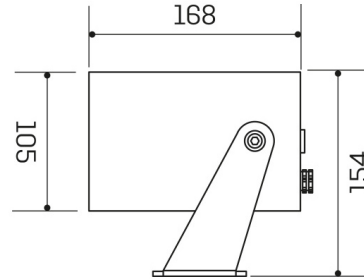

## Accessories



**Accento pickets**

STAKE for ACCENTO 14W 26W

Cod: MES0238



**Accento anchor bolts**

ANCHOR BOLTS FOR ACCENTO

Cod: MES0240



**Accento straps**

ACCENTO barrel strap

Cod: MES0241