

Chef 221mm

CHEF 32W 4000K IP54 White

Cod: MIC0024



IP20 / IP54

Protected against dust and splashes (only in the lower part of the product)



II

Protection class II



CRI >80

Colour rendering index >80



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: MIC0024 | Category: Indoor luminaires | Model: Chef 221mm | Product description: CHEF 32W 4000K IP54 White | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 3 | Lumen output (lm): 3300 | Beam angle: 100° | Photobiological risk: RG0 (exempt) | LED Lifetime: 50.000 h | Diameter (mm): 221 | Height (mm): 38 | Recess hole (mm): Ø 200 | Weight (g): 600 | IP rating: IP 20 / IP 54 (front) | Finishing colour: White | Body material: Die-cast aluminum | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +40° C | Nominal power (W): 32 | Power factor: > 0,9 | Power supply: 220/240V 50/60Hz | Ballast: Included | Insulation class: II | Dimmable: No |

Lighting data

| | | | |
|--------------------------|-------|----------------------|--------------|
| Color temperature (CCT) | 4000K | Photobiological risk | RG0 (exempt) |
| Color render index (CRI) | > 80 | LED Lifetime | 50.000 h |
| MacAdam (SDCM) | < 3 | | |
| Lumen output (lm) | 3300 | | |
| Beam angle | 100° | | |


Mechanical data

| | | | |
|------------------|-------|-------------------|-----------------------|
| Diameter (mm) | 221 | IP rating | IP 20 / IP 54 (front) |
| Height (mm) | 38 | Finishing colour | White |
| Recess hole (mm) | Ø 200 | Body material | Die-cast aluminum |
| Weight (g) | 600 | Diffuser material | PC (polycarbonate) |

Electrical data

| | | | |
|-------------------|------------------|------------------|----|
| Nominal power (W) | 32 | Insulation class | II |
| Power factor | 0,9 | Dimmable | No |
| Power supply | 220/240V 50/60Hz | | |
| Ballast | Included | | |

Photometry

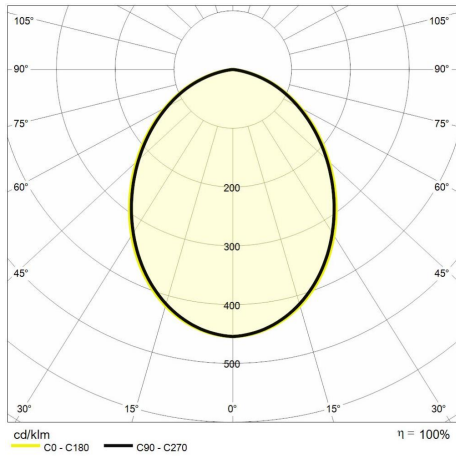

Technical drawing

