

Fascinum 3,2W

FASCINUM 3,2W 4000K 27 White

Cod: MIC0033



IP20
Protected from solid bodies larger than 12 mm



III
Protection class III



CRI >90
Colour rendering index >90



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: MIC0033 | Category: Indoor luminaires | Model: Fascinum 3,2W | Product description: FASCINUM 3,2W 4000K 27 White | Color temperature (CCT): 4000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 353 | Beam angle: 27° | Photobiological risk: RG1 (low risk) | LED Lifetime: 25.000 h | Diameter (mm): 54 | Height (mm): 84 | Recess hole (mm): Ø 49 | Weight (g): 150 | IP rating: IP 20 | Finishing colour: White RAL9003 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: PMMA (polymethyl methacrylate) | Maximal working temperature: -25° C | Minimal working temperature: +35° C | Nominal power (W): 3,2 | Power supply: 8,5V 350 mA | Ballast: Not included | Insulation class: III |

Lighting data

Color temperature (CCT)	4000K
-------------------------	-------

Color render index (CRI)	> 90
--------------------------	------

MacAdam (SDCM)	< 3
----------------	-----

Lumen output (lm)	353
-------------------	-----

Beam angle	27°
------------	-----

Photobiological risk	RG1 (low risk)
----------------------	----------------

LED Lifetime	25.000 h
--------------	----------

Mechanical data

Diameter (mm)	54
---------------	----

Height (mm)	84
-------------	----

Recess hole (mm)	Ø 49
------------------	------

Weight (g)	150
------------	-----

IP rating	IP 20
-----------	-------

Finishing colour	White RAL9003
------------------	---------------

Type of finishing	Polyester powder coated
-------------------	-------------------------

Body material	Aluminum
---------------	----------

Diffuser material	PMMA (polymethyl methacrylate)
-------------------	--------------------------------

Electrical data


Nominal power (W)	3.2
-------------------	-----

Power supply	8,5V 350 mA
--------------	-------------


Ballast	Not included
---------	--------------

Insulation class	III
------------------	-----

Photometry

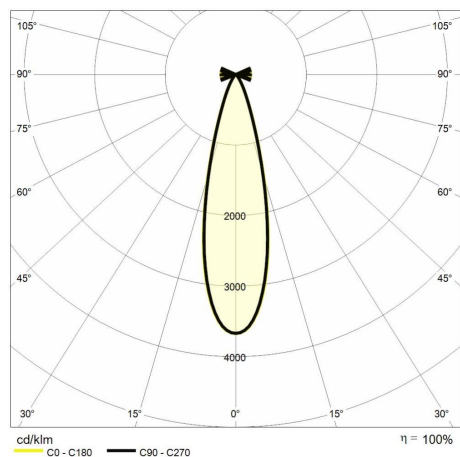

Technical drawing



Accessories



Caleido power supply

LED POWER SUPPLY 4W 350MA
CONSTANT CURRENT 2-11,5V
Cod: MID0002