



# Altissimo 18W

ALTISSIMO 18W 3000K 15° Adjustable  
White

Cod: **MIC0044**



IP20  
Protected from solid bodies larger  
than 12 mm



II  
Protection class II



CRI >90  
Colour rendering index >90



ReeR warranty  
ReeR guarantees the product for a  
time duration of 3 years



## Technical description

Product code: MIC0044 | Category: Indoor luminaires | Model: Altissimo 18W | Product description: ALTISSIMO 18W 3000K 15° Adjustable White | Color temperature (CCT): 3000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 1923 | Beam angle: 15° | Photobiological risk: RG1 (low risk) | LED Lifetime: 30.000 h | Diameter (mm): 111 | Height (mm): 106 | Recess hole (mm): Ø102 | Weight (g): 500 | IP rating: IP 20 | Finishing colour: White RAL9003 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: PMMA (polymethyl methacrylate) | Maximal working temperature: -25° C | Minimal working temperature: +35° C | Nominal power (W): 18 | Power factor: >0,9 | Power supply: 220/240V 50/60Hz | Ballast: Included | Insulation class: II | Dimmable: No |

## Lighting data

Color temperature (CCT)	3000K
Color render index (CRI)	> 90
MacAdam (SDCM)	< 3
Lumen output (lm)	1923
Beam angle	15°

Photobiological risk	RG1 (low risk)
LED Lifetime	30.000 h

## Mechanical data

Diameter (mm)	111
Height (mm)	106
Recess hole (mm)	Ø 102
Weight (g)	500
IP rating	IP 20


Finishing colour	White RAL9003
Type of finishing	Polyester powder coated
Body material	Aluminum
Diffuser material	PMMA (polymethyl methacrylate)

## Electrical data

Nominal power (W)	18
Power factor	0,9
Power supply	220/240V 50/60Hz
Ballast	Included

Insulation class	II
Dimmable	No

## Photometry

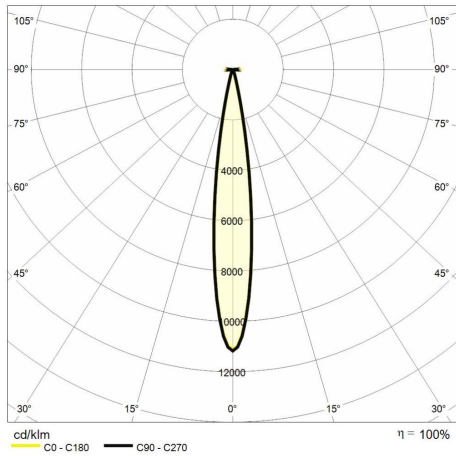

## Technical drawing

