



Altissimo 35W

ALTISSIMO 35W 3000K 50° Adjustable
White

Cod: **MIC0054**



IP20
Protected from solid bodies larger
than 12 mm



II
Protection class II



CRI >90
Colour rendering index >90



ReeR warranty
ReeR guarantees the product for a
time duration of 3 years



Technical description

Product code: MIC0054 | Category: Indoor luminaires | Model: Altissimo 35W | Product description: ALTISSIMO 35W 3000K 50° Adjustable White | Color temperature (CCT): 3000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 3084 | Beam angle: 50° | Photobiological risk: RG1 (low risk) | LED Lifetime: 30.000 h | Diameter (mm): 135 | Height (mm): 138 | Recess hole (mm): Ø 120 | Weight (g): 800 | IP rating: IP 20 | Finishing colour: White RAL9003 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: PMMA (polymethyl methacrylate) | Maximal working temperature: -25° C | Minimal working temperature: +35° C | Nominal power (W): 35 | Power factor: >0,9 | Power supply: 220/240V 50/60Hz | Ballast: Included | Insulation class: II | Dimmable: No |

Lighting data

Color temperature (CCT)	3000K
Color render index (CRI)	> 90
MacAdam (SDCM)	< 3
Lumen output (lm)	3084
Beam angle	50°

Photobiological risk	RG1 (low risk)
LED Lifetime	30.000 h

Mechanical data

Diameter (mm)	135
Height (mm)	138
Recess hole (mm)	Ø 120
Weight (g)	800
IP rating	IP 20


Finishing colour	White RAL9003
Type of finishing	Polyester powder coated
Body material	Aluminum
Diffuser material	PMMA (polymethyl methacrylate)

Electrical data

Nominal power (W)	3,5
Power factor	0,9
Power supply	220/240V 50/60Hz
Ballast	Included

Insulation class	II
Dimmable	No

Photometry

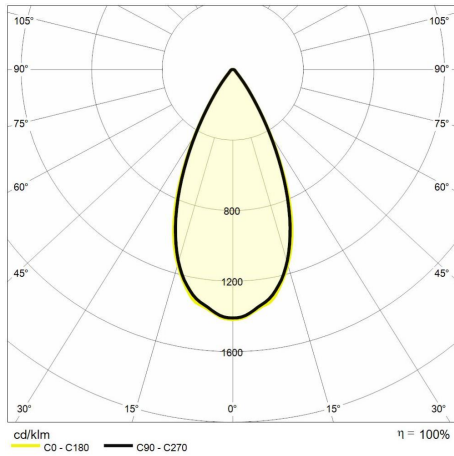

Technical drawing

