



# Globe 20W

GLOBO 20W 4000K 36 White RAL9003

Cod: **MIC0074**



IP20  
Protected from solid bodies larger than 12 mm



II  
Protection class II



CRI >90  
Colour rendering index >90



ReeR warranty  
ReeR guarantees the product for a time duration of 3 years



## Technical description

Product code: MIC0074 | Category: Indoor luminaires | Model: Globe 20W | Product description: GLOBE 20W 4000K 36 White RAL9003 | Color temperature (CCT): 4000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 1654 | Beam angle: 36° | Photobiological risk: RG2 (moderate risk) | LED Lifetime: 50.000 h | Diameter (mm): 112 | Height (mm): 112 | Recess hole (mm): Ø 105 | Weight (g): 500 | IP rating: IP 20 | Finishing colour: White RAL9003 | Body material: Aluminum and PC | Maximal working temperature: -25° C | Minimal working temperature: +50° C | Nominal power (W): 20 | Power factor: > 0,9 | Power supply: 220/240V 50/60Hz 500mA | Ballast: Included | Insulation class: II | Dimmable: No |

## Lighting data

Color temperature (CCT)	4000K
-------------------------	-------

Color render index (CRI)	> 90
--------------------------	------

MacAdam (SDCM)	< 3
----------------	-----

Lumen output (lm)	1654
-------------------	------

Beam angle	36°
------------	-----

Photobiological risk	RG2 (moderate risk)
----------------------	---------------------

LED Lifetime	50.000 h
--------------	----------

## Mechanical data

Diameter (mm)	112
---------------	-----

Height (mm)	112
-------------	-----

Recess hole (mm)	Ø105
------------------	------

Weight (g)	500
------------	-----

IP rating	IP 20
-----------	-------

Finishing colour	White RAL9003
------------------	---------------

Body material	Aluminum and PC
---------------	-----------------

## Electrical data

Nominal power (W)	20
-------------------	----

Power factor	0,9
--------------	-----


Power supply	220/240V 50/60Hz 500mA
--------------	------------------------

Ballast	Included
---------	----------

Insulation class	II
------------------	----

Dimmable	No
----------	----

## Photometry

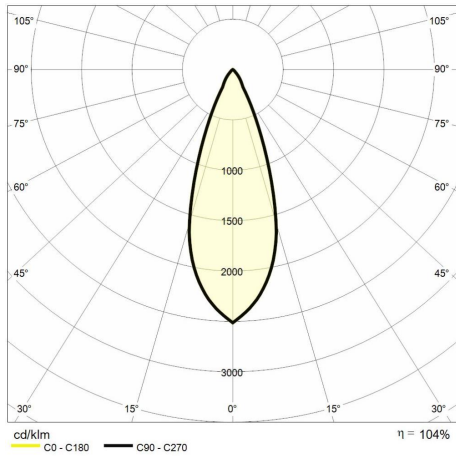

## Technical drawing

