



Monocubo

MONOCUBO 16W IP20 4000K white

Cod: **MPL0004**



IP20
Protected from solid bodies larger than 12 mm



I
Protection class I



CRI >90
Colour rendering index >90



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: MPL0004 | Category: Indoor luminaires | Model: Monocubo | Product description: MONOCUBO 16W IP20 4000K white | Color temperature (CCT): 4000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 1050 | Beam angle: 35° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Width (mm): 100 | Length (mm): 100 | Height (mm): 100 | Weight (g): 1000 | IP rating: IP 20 | Finishing colour: White RAL9003 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: PMMA (polymethyl methacrylate) | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 16 | Power factor: > 0,95 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: I | Dimmable: No |

Lighting data

Color temperature (CCT)	4000K
-------------------------	-------

Color render index (CRI)	> 90
--------------------------	------

MacAdam (SDCM)	< 3
----------------	-----

Lumen output (lm)	1050
-------------------	------

Beam angle	35°
------------	-----

Photobiological risk	RG1 (low risk)
----------------------	----------------

LED Lifetime	50.000 h
--------------	----------

Mechanical data

Width (mm)	100
------------	-----

Length (mm)	100
-------------	-----

Height (mm)	100
-------------	-----

Weight (g)	1000
------------	------

IP rating	IP 20
-----------	-------

Finishing colour	White RAL9003
------------------	---------------

Type of finishing	Polyester powder coated
-------------------	-------------------------

Body material	Aluminum
---------------	----------

Diffuser material	PMMA (polymethyl methacrylate)
-------------------	--------------------------------

Electrical data

Nominal power (W)	16
-------------------	----

Power factor	> 0,95
--------------	--------


Power supply	230V 50/60Hz
--------------	--------------

Ballast	Integrated
---------	------------

Insulation class	I
------------------	---

Dimmable	No
----------	----

Photometry

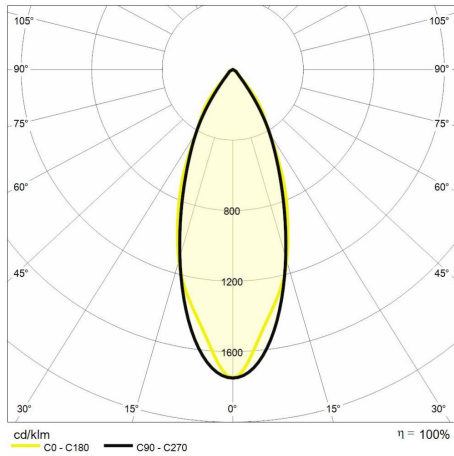

Technical drawing

