



Effetto 28W

EFFETTO 4000K 28W 30° White
(700mA)

Cod: **MTK0026**



IP20

Protected from solid bodies larger than 12 mm



II

Protection class II



CRI >90

Colour rendering index >90



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: MTK0026 | Category: Indoor luminaires | Model: Effetto 28W | Product description: EFFETTO 4000K 28W 30° White (700mA) | Color temperature (CCT): 4000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 2852 | Beam angle: 30° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Diameter (mm): 95 | Height (mm): 113 | Weight (g): 1200 | IP rating: IP 20 | Finishing colour: White RAL9016 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -20° C | Minimal working temperature: +55° C | Nominal power (W): 28 | Power factor: > 0,9 | Power supply: 220/240V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

| | | | |
|--------------------------|-------|----------------------|----------------|
| Color temperature (CCT) | 4000K | Photobiological risk | RG1 (low risk) |
| Color render index (CRI) | > 90 | LED Lifetime | 50.000 h |
| MacAdam (SDCM) | < 3 | | |
| Lumen output (lm) | 2852 | | |
| Beam angle | 30° | | |


Mechanical data

| | | | |
|---------------|-------|-------------------|-------------------------|
| Diameter (mm) | 95 | Finishing colour | White RAL9016 |
| Height (mm) | 113 | Type of finishing | Polyester powder coated |
| Weight (g) | 1200 | Body material | Aluminum |
| IP rating | IP 20 | Diffuser material | Tempered glass |

Electrical data

| | | | |
|-------------------|------------------|------------------|----|
| Nominal power (W) | 28 | Insulation class | II |
| Power factor | 0,9 | Dimmable | No |
| Power supply | 220/240V 50/60Hz | | |
| Ballast | Integrated | | |

Photometry

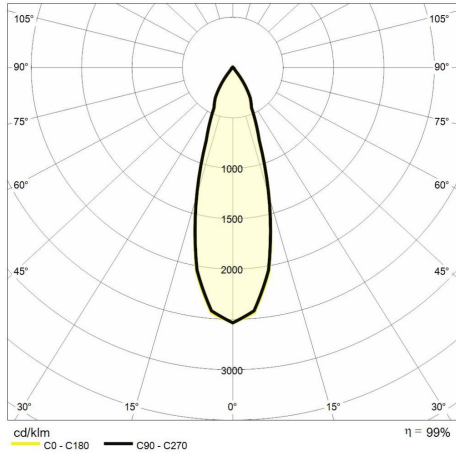

Technical drawing

