



# Effetto 33W

EFFETTO 3000K 33W 16° White (850mA)

Cod: **MTK0033**



**IP20**  
Protected from solid bodies larger than 12 mm



**II**  
Protection class II



**CRI >90**  
Colour rendering index >90



**ReeR warranty**  
ReeR guarantees the product for a time duration of 3 years



## Technical description

Product code: MTK0033 | Category: Indoor luminaires | Model: Effetto 33W | Product description: EFFETTO 3000K 33W 16° White (850mA) | Color temperature (CCT): 3000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 3220 | Beam angle: 16° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Diameter (mm): 95 | Height (mm): 113 | Weight (g): 1200 | IP rating: IP 20 | Finishing colour: White RAL9016 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -20° C | Minimal working temperature: +55° C | Nominal power (W): 33 | Power factor: > 0,9 | Power supply: 220/240V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

### Lighting data

Color temperature (CCT)	3000K
Color render index (CRI)	> 90
MacAdam (SDCM)	< 3
Lumen output (lm)	3220
Beam angle	16°

Photobiological risk	RG1 (low risk)
LED Lifetime	50.000 h

### Mechanical data

Diameter (mm)	95
Height (mm)	113
Weight (g)	1200
IP rating	IP 20


Finishing colour	White RAL9016
Type of finishing	Polyester powder coated
Body material	Aluminum
Diffuser material	Tempered glass

### Electrical data

Nominal power (W)	33
Power factor	0,9
Power supply	220/240V 50/60Hz
Ballast	Integrated

Insulation class	II
Dimmable	No

## Photometry

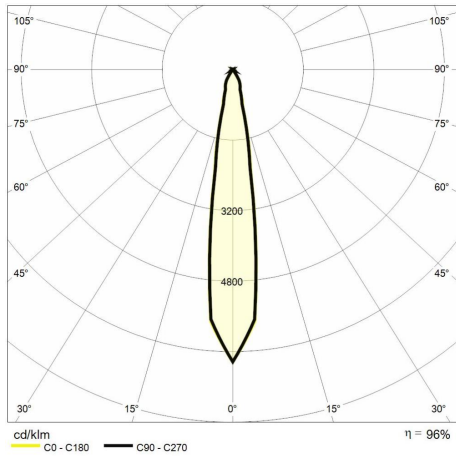

## Technical drawing

