



Effetto 33W

EFFETTO 3000K 33W 40° White
(850mA)

Cod: **MTK0035**



IP20

Protected from solid bodies larger than 12 mm



II

Protection class II



CRI >90

Colour rendering index >90



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: MTK0035 | Category: Indoor luminaires | Model: Effetto 33W | Product description: EFFETTO 3000K 33W 40° White (850mA) | Color temperature (CCT): 3000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 3220 | Beam angle: 40° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Diameter (mm): 95 | Height (mm): 113 | Weight (g): 1200 | IP rating: IP 20 | Finishing colour: White RAL9016 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -20° C | Minimal working temperature: +55° C | Nominal power (W): 33 | Power factor: > 0,9 | Power supply: 220/240V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

| | |
|-------------------------|-------|
| Color temperature (CCT) | 3000K |
|-------------------------|-------|

| | |
|--------------------------|------|
| Color render index (CRI) | > 90 |
|--------------------------|------|

| | |
|----------------|-----|
| MacAdam (SDCM) | < 3 |
|----------------|-----|

| | |
|-------------------|------|
| Lumen output (lm) | 3220 |
|-------------------|------|

| | |
|------------|-----|
| Beam angle | 40° |
|------------|-----|

| | |
|----------------------|----------------|
| Photobiological risk | RG1 (low risk) |
|----------------------|----------------|

| | |
|--------------|----------|
| LED Lifetime | 50.000 h |
|--------------|----------|

Mechanical data

| | |
|---------------|----|
| Diameter (mm) | 95 |
|---------------|----|

| | |
|-------------|-----|
| Height (mm) | 113 |
|-------------|-----|

| | |
|------------|------|
| Weight (g) | 1200 |
|------------|------|

| | |
|-----------|-------|
| IP rating | IP 20 |
|-----------|-------|

| | |
|------------------|---------------|
| Finishing colour | White RAL9016 |
|------------------|---------------|

| | |
|-------------------|-------------------------|
| Type of finishing | Polyester powder coated |
|-------------------|-------------------------|

| | |
|---------------|----------|
| Body material | Aluminum |
|---------------|----------|

| | |
|-------------------|----------------|
| Diffuser material | Tempered glass |
|-------------------|----------------|

Electrical data

| | |
|-------------------|----|
| Nominal power (W) | 33 |
|-------------------|----|

| | |
|--------------|-----|
| Power factor | 0,9 |
|--------------|-----|


| | |
|--------------|------------------|
| Power supply | 220/240V 50/60Hz |
|--------------|------------------|

| | |
|---------|------------|
| Ballast | Integrated |
|---------|------------|

| | |
|------------------|----|
| Insulation class | II |
|------------------|----|

| | |
|----------|----|
| Dimmable | No |
|----------|----|

Photometry

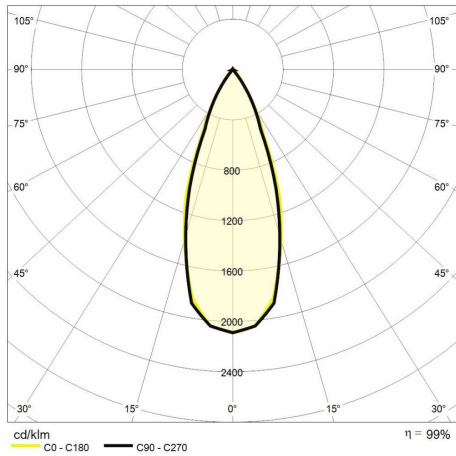

Technical drawing

