



# Effetto 33W

EFFETTO 3000K 33W 60° White  
(850mA)

Cod: **MTK0036**



IP20  
Protected from solid bodies larger than 12 mm



II  
Protection class II



CRI >90  
Colour rendering index >90



ReeR warranty  
ReeR guarantees the product for a time duration of 3 years



## Technical description

Product code: MTK0036 | Category: Indoor luminaires | Model: Effetto 33W | Product description: EFFETTO 3000K 33W 60° White (850mA) | Color temperature (CCT): 3000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 3220 | Beam angle: 60° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Diameter (mm): 95 | Height (mm): 113 | Weight (g): 1200 | IP rating: IP 20 | Finishing colour: White RAL9016 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -20° C | Minimal working temperature: +55° C | Nominal power (W): 33 | Power factor: > 0,9 | Power supply: 220/240V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

### Lighting data

|                          |       |
|--------------------------|-------|
| Color temperature (CCT)  | 3000K |
| Color render index (CRI) | > 90  |
| MacAdam (SDCM)           | < 3   |
| Lumen output (lm)        | 3220  |
| Beam angle               | 60°   |

|                      |                |
|----------------------|----------------|
| Photobiological risk | RG1 (low risk) |
| LED Lifetime         | 50.000 h       |

### Mechanical data

|               |       |
|---------------|-------|
| Diameter (mm) | 95    |
| Height (mm)   | 113   |
| Weight (g)    | 1200  |
| IP rating     | IP 20 |


|                   |                         |
|-------------------|-------------------------|
| Finishing colour  | White RAL9016           |
| Type of finishing | Polyester powder coated |
| Body material     | Aluminum                |
| Diffuser material | Tempered glass          |

### Electrical data

|                   |                  |
|-------------------|------------------|
| Nominal power (W) | 33               |
| Power factor      | 0,9              |
| Power supply      | 220/240V 50/60Hz |
| Ballast           | Integrated       |

|                  |    |
|------------------|----|
| Insulation class | II |
| Dimmable         | No |

## Photometry

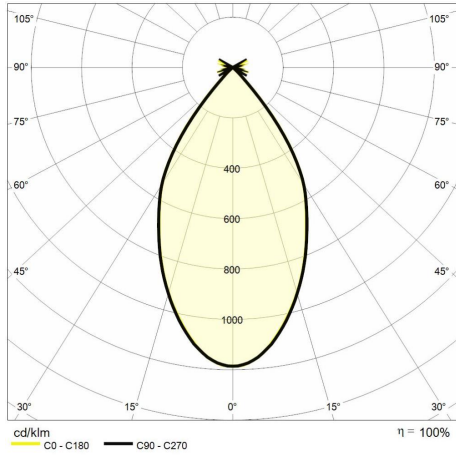

## Technical drawing

