



# Effetto 39W

EFFETTO 3000K 39W 40° White  
(950mA)

Cod: **MTK0051**



**IP20**  
Protected from solid bodies larger than 12 mm



**II**  
Protection class II



**CRI >90**  
Colour rendering index >90



**ReeR warranty**  
ReeR guarantees the product for a time duration of 3 years



## Technical description

Product code: MTK0051 | Category: Indoor luminaires | Model: Effetto 39W | Product description: EFFETTO 3000K 39W 40° White (950mA) | Color temperature (CCT): 3000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 3544 | Beam angle: 40° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Diameter (mm): 95 | Height (mm): 113 | Weight (g): 1200 | IP rating: IP 20 | Finishing colour: White RAL9016 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -20° C | Minimal working temperature: +55° C | Nominal power (W): 39 | Power factor: > 0,9 | Power supply: 220/240V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

### Lighting data

Color temperature (CCT)	3000K
-------------------------	-------

Color render index (CRI)	> 90
--------------------------	------

MacAdam (SDCM)	< 3
----------------	-----

Lumen output (lm)	3544
-------------------	------

Beam angle	40°
------------	-----

Photobiological risk	RG1 (low risk)
----------------------	----------------

LED Lifetime	50.000 h
--------------	----------

### Mechanical data

Diameter (mm)	95
---------------	----

Height (mm)	113
-------------	-----

Weight (g)	1200
------------	------

IP rating	IP 20
-----------	-------

Finishing colour	White RAL9016
------------------	---------------

Type of finishing	Polyester powder coated
-------------------	-------------------------

Body material	Aluminum
---------------	----------

Diffuser material	Tempered glass
-------------------	----------------

### Electrical data

Nominal power (W)	39
-------------------	----

Power factor	0,9
--------------	-----


Power supply	220/240V 50/60Hz
--------------	------------------

Ballast	Integrated
---------	------------

Insulation class	II
------------------	----

Dimmable	No
----------	----

## Photometry

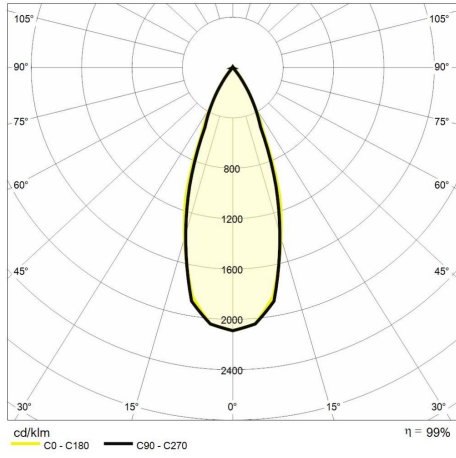

## Technical drawing

