



Effetto 39W

EFFETTO 4000K 39W 60° White
(950mA)

Cod: **MTK0060**



IP20
Protected from solid bodies larger than 12 mm



II
Protection class II



CRI >90
Colour rendering index >90



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: MTK0060 | Category: Indoor luminaires | Model: Effetto 39W | Product description: EFFETTO 4000K 39W 60° White (950mA) | Color temperature (CCT): 4000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 3724 | Beam angle: 60° | Photobiological risk: RG1 (low risk) | LED Lifetime: 50.000 h | Diameter (mm): 95 | Height (mm): 113 | Weight (g): 1200 | IP rating: IP 20 | Finishing colour: White RAL9016 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: Tempered glass | Maximal working temperature: -20° C | Minimal working temperature: +55° C | Nominal power (W): 39 | Power factor: > 0,9 | Power supply: 220/240V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

Color temperature (CCT)	4000K	Photobiological risk	RG1 (low risk)
Color render index (CRI)	> 90	LED Lifetime	50.000 h
MacAdam (SDCM)	< 3		
Lumen output (lm)	3724		
Beam angle	60°		


Mechanical data

Diameter (mm)	95	Finishing colour	White RAL9016
Height (mm)	113	Type of finishing	Polyester powder coated
Weight (g)	1200	Body material	Aluminum
IP rating	IP 20	Diffuser material	Tempered glass

Electrical data

Nominal power (W)	39	Insulation class	II
Power factor	0,9	Dimmable	No
Power supply	220/240V 50/60Hz		
Ballast	Integrated		

Photometry

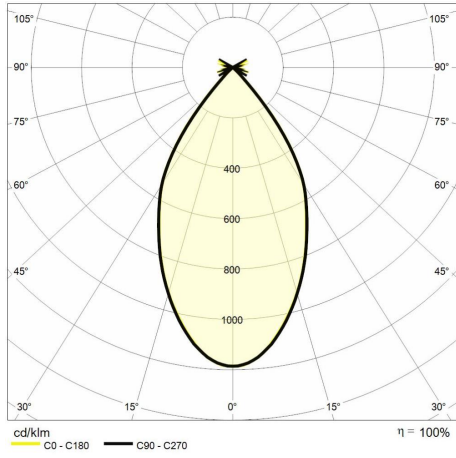

Technical drawing

