

Miniled III - 873mm

MINILED III 14W 3000K 873x22x30mm

Cod: **6360787**



IP20

Protected from solid bodies larger than 12 mm



II

Protection class II



CRI >80

Colour rendering index >80



ReeR warranty

ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6360787 | Category: Indoor luminaires | Model: Miniled III - 873mm | Product description: MINILED III 14W 3000K 873x22x30mm | Source type: SMD 2835 | Number of LEDs: 125 | Color temperature (CCT): 3000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1400 | Beam angle: 150° | Photobiological risk: RG0 (exempt) | LED Lifetime: 25.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 22 | Length (mm): 873 | Height (mm): 30 | Weight (g): 170 | IP rating: IP 20 | Finishing colour: White | Body material: PC (polycarbonate) | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +50° C | Nominal power (W): 14 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

Source type	SMD 2835	Beam angle	150°
Number of LEDs	125	Photobiological risk	RG0 (exempt)
Color temperature (CCT)	3000K	LED Lifetime	25.000 h
Color render index (CRI)	> 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): E
MacAdam (SDCM)	< 6		
Lumen output (lm)	1400		


Mechanical data

Width (mm)	22	IP rating	IP 20
Length (mm)	873	Finishing colour	White
Height (mm)	30	Body material	PC (polycarbonate)
Weight (g)	170	Diffuser material	PC (polycarbonate)


Electrical data

Nominal power (W)	14	Insulation class	II
Power factor	0,5	Dimmable	No
Power supply	230V 50/60Hz		
Ballast	Integrated		

Photometry

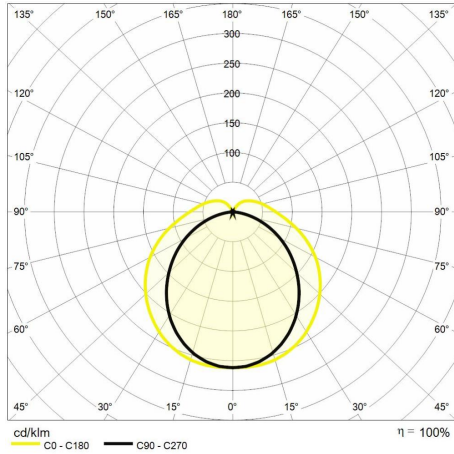

Technical drawing

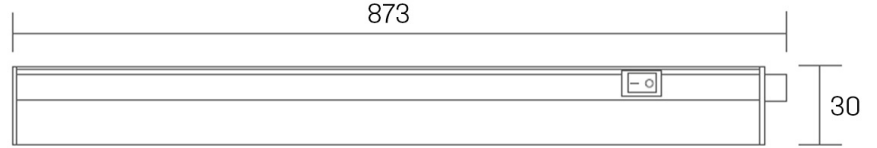

Accessories



Miniled cables

CONNECTOR for Miniled connection

Cod: 6360484