



# Unica EVO mono 600mm

UNICA EVO MONO 12W IP65 600mm  
4000K

Cod: **6360976**



**IP65**  
Dustproof and protected against  
water jets



**I**  
Protection class I



**CRI >80**  
Colour rendering index >80



**ReeR warranty**  
ReeR guarantees the product for a  
time duration of 3 years



## Technical description

Product code: 6360976 | Category: Outdoor luminaires | Model: Unica EVO mono 600mm | Product description: UNICA EVO MONO 12W IP65 600mm 4000K | Source type: SMD | Number of LEDs: 62 | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 4 | Lumen output (lm): 1400 | Beam angle: 120° | Photobiological risk: RG0 (exempt) | LED Lifetime: 50.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): E | Width (mm): 72 | Length (mm): 600 | Height (mm): 58 | Weight (g): 620 | IP rating: IP 65 | IK rating: IK 08 | Finishing colour: Grey | Body material: PC (polycarbonate) | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +55° C | Nominal power (W): 12 | Power factor: > 0,9 | Power supply: 230V 50/60Hz | Ballast: Included | Insulation class: I | Dimmable: No |

## Lighting data

|                          |       |                         |  |
|--------------------------|-------|-------------------------|--|
| Source type              | SMD   | Beam angle              | 120°   |
| Number of LEDs           | 62    | Photobiological risk    | RG0 (exempt)   |
| Color temperature (CCT)  | 4000K | LED Lifetime            | 50.000 h   |
| Color render index (CRI) | > 80  | Energy efficiency class | This contains a light source of energy efficiency class (EU2019/2015): E |
| MacAdam (SDCM)           | < 4   |                         |  |
| Lumen output (lm)        | 1400  |                         |  |


## Mechanical data

|             |       |                   |                    |
|-------------|-------|-------------------|--------------------|
| Width (mm)  | 72    | IK rating         | IK 08              |
| Length (mm) | 600   | Finishing colour  | Grey               |
| Height (mm) | 58    | Body material     | PC (polycarbonate) |
| Weight (g)  | 620   | Diffuser material | PC (polycarbonate) |
| IP rating   | IP 65 |                   |                    |

## Electrical data

|                   |              |                  |    |
|-------------------|--------------|------------------|----|
| Nominal power (W) | 1,2          | Insulation class | I  |
| Power factor      | 0,9          | Dimmable         | No |
| Power supply      | 230V 50/60Hz |                  |    |
| Ballast           | Included     |                  |    |

## Photometry

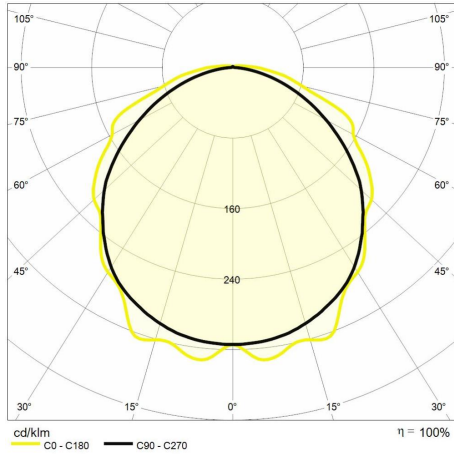

## Technical drawing

