



Specchio 600mm

SPECCHIO 15W 230V IP44 4000K
600mm silver

Cod: **6360982**



IP44
Protected against solid objects larger than 1 mm and splashes



II
Protection class II



CRI >80
Colour rendering index >80



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: 6360982 | Category: Indoor luminaires | Model: Specchio 600mm | Product description: SPECCHIO 15W 230V IP44 4000K 600mm silver | Source type: SMD | Number of LEDs: 30 | Color temperature (CCT): 4000K | Color render index (CRI): > 80 | MacAdam (SDCM): < 6 | Lumen output (lm): 1200 | Beam angle: 133° | Photobiological risk: RG0 (exempt) | LED Lifetime: 30.000 h | Energy efficiency class: This contains a light source of energy efficiency class (EU2019/2015): F | Width (mm): 53 | Length (mm): 600 | Height (mm): 65 | Weight (g): 460 | IP rating: IP 44 | Finishing colour: Silver | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: PC (polycarbonate) | Maximal working temperature: -20° C | Minimal working temperature: +45° C | Nominal power (W): 15 | Power factor: > 0,5 | Power supply: 230V 50/60Hz | Ballast: Integrated | Insulation class: II | Dimmable: No |

Lighting data

Source type	SMD	Beam angle	133°
Number of LEDs	30	Photobiological risk	RG0 (exempt)
Color temperature (CCT)	4000K	LED Lifetime	30.000 h
Color render index (CRI)	> 80	Energy efficiency class	This contains a light source of energy efficiency class (EU2019/2015): F
MacAdam (SDCM)	< 6		
Lumen output (lm)	1200		


Mechanical data

Width (mm)	53	Finishing colour	Silver
Length (mm)	600	Type of finishing	Polyester powder coated
Height (mm)	65	Body material	Aluminum
Weight (g)	460	Diffuser material	PC (polycarbonate)
IP rating	IP 44		

Electrical data

Nominal power (W)	15	Insulation class	II
Power factor	0,5	Dimmable	No
Power supply	230V 50/60Hz		
Ballast	Integrated		

Photometry

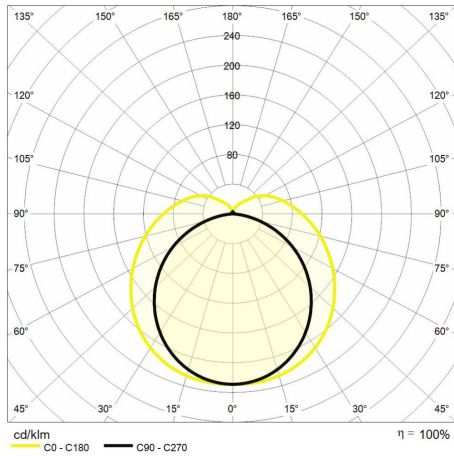

Technical drawing

