

Fascinum 10,7W

FASCINUM 10,7W 4000K 37 White

Cod: **MIC0036**

IP20
Protected from solid bodies larger than 12 mm



III
Protection class III



CRI >90
Colour rendering index >90



ReeR warranty
ReeR guarantees the product for a time duration of 3 years



Technical description

Product code: MIC0036 | Category: Indoor luminaires | Model: Fascinum 10,7W | Product description: FASCINUM 10,7W 4000K 37 White | Color temperature (CCT): 4000K | Color render index (CRI): > 90 | MacAdam (SDCM): < 3 | Lumen output (lm): 1211 | Beam angle: 37° | Photobiological risk: RG1 (low risk) | LED Lifetime: 25.000 h | Diameter (mm): 90 | Height (mm): 126 | Recess hole (mm): Ø 82 | Weight (g): 450 | IP rating: IP 20 | Finishing colour: White RAL9003 | Type of finishing: Polyester powder coated | Body material: Aluminum | Diffuser material: PMMA (polymethyl methacrylate) | Maximal working temperature: -25° C | Minimal working temperature: +35° C | Nominal power (W): 10,7 | Power supply: 36V 300 mA | Ballast: Not included | Insulation class: III |

Lighting data

Color temperature (CCT)	4000K	Photobiological risk	RG1 (low risk)
Color render index (CRI)	> 90	LED Lifetime	25.000 h
MacAdam (SDCM)	< 3		
Lumen output (lm)	1211		
Beam angle	37°		


Mechanical data

Diameter (mm)	90	Finishing colour	White RAL9003
Height (mm)	126	Type of finishing	Polyester powder coated
Recess hole (mm)	Ø 82	Body material	Aluminum
Weight (g)	450	Diffuser material	PMMA (polymethyl methacrylate)
IP rating	IP 20		


Electrical data

Nominal power (W)	10.7	Insulation class	III
Power supply	36V 300 mA		
Ballast	Not included		

Photometry

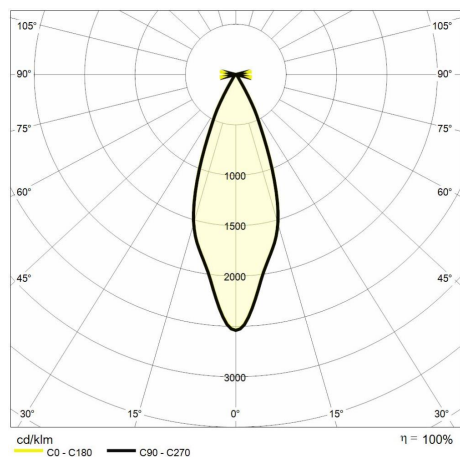

Technical drawing



Accessories



Fascinum power supply

LED POWER SUPPLY 2,5-15W 300MA
CONST,COR,2-41,5V
Cod: MID0014